

12 LEVEL III

AD-E 440125


AD

TECHNICAL REPORT ARLCB-TR-81020

SUPERCONDUCTIVITY IN PRESSURE QUENCHED
CADMIUM SULFIDE AT 77 K

C. G. Homan
K. Laojindapun
R. K. MacCrone

May 1981

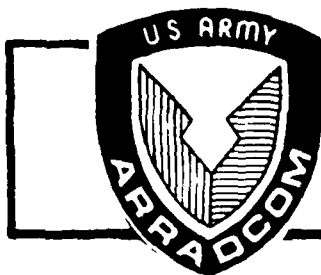

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER WEAPON SYSTEMS LABORATORY
BENÉT WEAPONS LABORATORY
WATERVLIET, N. Y. 12189

AMCMS No. 611102H600011

PRON No. 1A1283121A1A

DTIC
ELECTE
S JUL 13 1981 D
B

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

DTIC FILE COPY

81 6 22 099

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.


The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARLCB-TR-81020	2. GOVT ACCESSION NO. AD A101265	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SUPERCONDUCTIVITY IN PRESSURE QUENCHED CADMIUM SULFIDE AT 77 K		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) C. G. Homan (BWL), K. Laojindapun (RPI), and R. K. MacCrone (RPI).		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Armament Research & Development Command Benet Weapons Laboratory, DRDAR-LCB-TL Watervliet, NY 12189		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 611102H600011 PRON No. 1A1283121A1A
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Armament Research & Development Command Large Caliber Weapon Systems Laboratory Dover, NJ 07801		12. REPORT DATE May 1981
14. MONITORING AGENCY NAME & ADDRESS (If different from Controlling Office)		13. NUMBER OF PAGES 15
		15. SECURITY CLASS. (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES To be presented at XVI International Conference on Low Temperature Physics, 19-25 August 1981, Los Angeles, CA. To be published in Journal of Physical Review Letters.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Cadmium Sulfide Diamagnetism Pressure Quenched Superconductivity		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Observations of magnetic field induced collapse of Meissner sized diamagnetism with a coincident decrease in electrical conductivity in pressure quenched CdS material at 77 K are reported. These results are consistent with the existence of superconducting regions in the specimens at this temperature.		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)



SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGEMENTS	11
INTRODUCTION	1
EXPERIMENTAL CONSIDERATIONS	2
EXPERIMENTAL RESULTS	6
Diamagnetism and ac Conductivity as a Function of H	6
Diamagnetism and dc Conductivity as a Function of H	8
DISCUSSION	8
CONCLUSIONS	11
REFERENCES	13

LIST OF ILLUSTRATIONS

- | | | |
|-----------|---|---|
| 1. Upper: | Dielectric response of pressure quenched CdS as a function of applied magnetic field. | 7 |
| Middle: | ac Resistance of pressure quenched CdS as a function of applied magnetic field. | |
| Lower: | Magnetic moment of pressure quenched CdS as a function of applied magnetic field. | |
| 2. Upper: | dc Resistance observed during the magnetic moment. | 9 |
| Lower: | Magnetic moment of pressure quenched CdS as a function of applied magnetic field. | |

Accession For	
NTIS	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A	

ACKNOWLEDGEMENTS

We would like to thank E. Brown, D. Kendall, and P. J. Cote for helpful discussions, W. Yaiser for technical assistance and expertise, T. Brassard and L. McNamara for metallographic examination and preliminary chemical analysis by M. Fleszar and W. Legasse. The NBS chemical analysis was performed under the auspices of G. P. Piermarini.

The financial support of Benet Weapons Laboratory, ARRADCOM under contract DAAA-22-80-C-0256, the Air Force Office of Scientific Research under contract AFOSR-79-0216, and the Office of Naval Research under contract N00014-80-C-0828 is gratefully acknowledged.

INTRODUCTION

Recently we have reported large diamagnetism of Meissner proportions in pressure quenched CdS at 77 K.¹ At present only the superconducting state is known to exhibit such large diamagnetism, so it was natural to suggest that a superconducting state was also responsible for the large diamagnetism observed in this material. Zero resistance, the other well known characteristic of superconductivity, has not been observed in these specimens. Metallographic observations show that the specimens are inhomogeneous with gross lenticular platelets parallel to the plane of the disk,^{2,3} and the finite resistance we believe results simply from incomplete interconnectivity between the superconducting regions; that is a zero resistance percolation pathway from one side of the specimen to the other does not exist. On this structural basis the disappearance of large diamagnetism with a simultaneous decrease in conductivity in an active specimen of pressure quenched CdS would be strong evidence for the existence of superconducting regions in the specimen, involving itinerant electrons, rather than, for example, the superdiamagnetic state.

In this report we describe the observation of such superconducting behavior in several specimens of pressure quenched CdS, namely the simultaneous disappearance of large diamagnetism with a coincident decrease in the

¹E. Brown, C. G. Homan, and R. K. MacCrone, Phys. Rev. Lett. 45, 478 (1980).

²C. G. Homan and D. P. Kendall, Bull. Am. Phys. Soc. 24, 316 (1979). Details are presented in ARRADCOM Technical Report No. ARLCB-TR-79004, available from NTIS, Springfield, VA, AD No. A069-609.

³C. G. Homan, D. P. Kendall, and R. K. MacCrone, Solid State Comm. 32, 521 (1979).

electrical conductivity. We believe that these observations provide very strong evidence for the existence of some kind of superconducting state at temperatures far in excess of those encountered heretofore. Several new aspects of the electrical and magnetic behaviors in this material are also presented.

EXPERIMENTAL CONSIDERATIONS

The diamagnetic properties of interest are known to depend critically on the purity of the starting material, the pressurizing history, the thermal history and the magnetic history. In addition, the specimens are metastable at room temperature and below,^{2,3} so that it is not possible to perform magnetization and electrical measurements sequentially and make meaningful comparisons; the condition of the specimen will simply not be the same. To obtain incontrovertible results, it is necessary to observe the collapse of flux exclusion and at the same time a concomitant decrease in conductivity in one and the same specimen.

A special specimen holder for a vibrating specimen magnetometer was constructed so that dc and ac resistance measurements could be made while the magnetic moment was being measured. Essentially the device consisted of a silica tube carrying the lower copper electrode, through which a second concentric silica tube passed and which carried the upper copper electrode.

²C. G. Homan and D. P. Kendall, Bull. Am. Phys. Soc. 24, 316 (1979). Details are presented in ARRADCOM Technical Report No. ARLCB-TR-79004, available from NTIS, Springfield, VA, AD No. A069-609.

³C. G. Homan, D. P. Kendall, and R. K. MacCrone, Solid State Comm. 32, 521 (1979).

In this way, the electrode faces were maintained in alignment and the miniature co-axial shielded cable brought to the outside world through a series of judiciously placed holes and slots. The specimen is simply slipped between the electrodes and maintained under light pressure from small springs far removed from the pick up coils. A cryostat provides controllable temperatures from 20 to 300 K (Air Products Helitran).

The relatively complex holder with wires and electrodes is not as magnetically inert as that used in the previous work.¹ The empty specimen holder shows a small temperature and field dependent magnetization. The specimen holder has been repeatedly run at a variety of temperatures and magnetic fields. At any temperature, the response of the specimen holder over one field sweep may differ slightly from another run on another day, due to uncontrollable variables encountered in mounting and demounting the rod, for example. On the other hand, the reproducibility during a single run is very good, with excellent temporal stability. Relative changes in the magnetization of a single specimen can thus be determined with higher accuracy. We have analyzed the overall statistical error and find a conservative estimate of the standard deviation in the magnetic moment to be 1.5×10^{-2} gauss below 1 kOe and twice that at higher fields. Our thrust is to establish not only diamagnetism but also to observe the disappearance of diamagnetism accompanied by a decrease in conductivity.

¹E. Brown, C. G. Homan, and R. K. MacCrone, Phys. Rev. Lett. 45, 478 (1980).

dc Resistance measurements were made using a current amplifier in a simple series circuit, with one to six volts supplied from a battery. ac Capacitance and conductive (or loss) measurements were made at 1 kHz using a G.R. 1615 capacitance bridge. The output of the magnetometer and the dc current or the capacitance and conductance off balance (which may be achieved by using two lock-in amplifiers) were simultaneously displayed on X-Y recorders, the abscissa of each being driven by the same time-base generator. In this way it is possible to obtain a complete one-to-one correspondence between any changes taking place amongst these quantities. The balance of the capacitance bridge was adjusted as required during the experiment, and similarly the current amplifier gain and/or offset.

For electrical contacts we relied solely on the mechanical pressure of the copper disks previously described. The metastability of the samples precludes the painting or evaporation of electrodes. Gentle tapping and the rotation of the upper and lower contacts revealed that the contacts were stable. To test for surface effects, numerous I versus V curves at 77 K have been taken which show ohmic behavior, reversibility, and no polarization effects. During capacitance measurements, dc bias up to ~ 200 V/cms was applied from time to time which resulted in a (reversible) capacitance change of only ~ 1 percent. At room temperature, where this sample showed no anomalous flux exclusion, the relative dielectric constant ϵ of CdS was determined from the capacitance measurements to be 5.3 ± 1.0 , which compares favorably with literature value of 5.2.⁴ This agreement is taken as evidence

⁴J. C. Phillips, Phys. Rev. Lett. 20, 550 (1968).

that any contribution from the surface capacitance of a Schottky barrier is essentially absent. In this two terminal measurement, the stray components of capacitance are not magnetic field dependent.

The sample material used in this study, Optronix grade CdS powders from Alpha Inorganic stock no. 20130, was from the same lot used in the previous studies.¹⁻³ Preliminary chemical analysis of the starting powder yielded total metallic impurities in the 20 ppm range.¹ An x-ray fluorescence spectroscopic analysis was performed by NBS to give a qualitative chemical analysis of all impurities ($Z > 11$). In addition both the starting materials and the pressure quenched samples have been characterized by x-ray measurements, differential scanning calorimetry, optical microscopy and metallography, results which have been reported elsewhere.^{2,5} Electron and ion microprobe analyses have been performed on both starting materials and pressure quenched, magnetically active samples.⁶ These techniques have provided a quantitative chemical analysis of all elements $Z > 1$ in our material and indicate that the starting materials used in these studies were heavily contaminated or doped with Cl and Si to levels in the 1 wt % range.

¹E. Brown, C. G. Homan, and R. K. MacCrone, Phys. Rev. Lett. 45, 478 (1980).

²C. G. Homan and D. P. Kendall, Bull. Am. Phys. Soc. 24, 316 (1979). Details are presented in ARRADCOM Technical Report No. ARLCB-TR-79004, available from NTIS, Springfield, VA, AD No. A069-609.

³C. G. Homan, D. P. Kendall, and R. K. MacCrone, Solid State Comm. 32, 521 (1979).

⁵P. J. Cote, G. P. Capsimalis, and C. G. Homan, Private Communication, to be published in Applied Physics Letters, May 1981.

⁶Private Communication - U.S. National Bureau of Standards, Report No. 553-33-Y-81, 1980 (unpublished).

The data presented in this report were obtained from samples pressure quenched at a lower rate than the preceding paper.¹ The pressure quenching was accomplished at a nominal rate of 10^6 bars/sec, but a conservative estimate based on the measured unloading rate suggests that the quench rate for these samples was greater than 3×10^5 bars/sec. The same technique applied in the previous work yielded a minimum quench rate of 1×10^6 bars/sec.¹

A systematic study of the role and interrelationship of the impurity and quench rate variables is still under active investigation. This work represents an effort of considerable magnitude and will be subsequently submitted.


EXPERIMENTAL RESULTS

Diamagnetism and ac Conductivity as a Function of H


A pressure quenched CdS specimen was cooled to 77 K and the magnetization and ac conductivity measured as a function of magnetic field. In this case the dissipation, D, was measured rather than the conductance, G, which in this specimen was small. The results are shown in Figure 1.

At low fields the specimen exhibits a diamagnetic susceptibility amounting to six percent of $-1/4\pi$, the Meissner value. At about 600 Oe the specimen shows the onset of some instability accompanied by a capacitance and loss decrease. The flux exclusion is four percent at this point. Between 825 and 1500 Oe, the diamagnetism decreases to zero, while the capacitance and


¹E. Brown, C. G. Homan, and R. K. MacCrone, Phys. Rev. Lett. 45, 478 (1980).

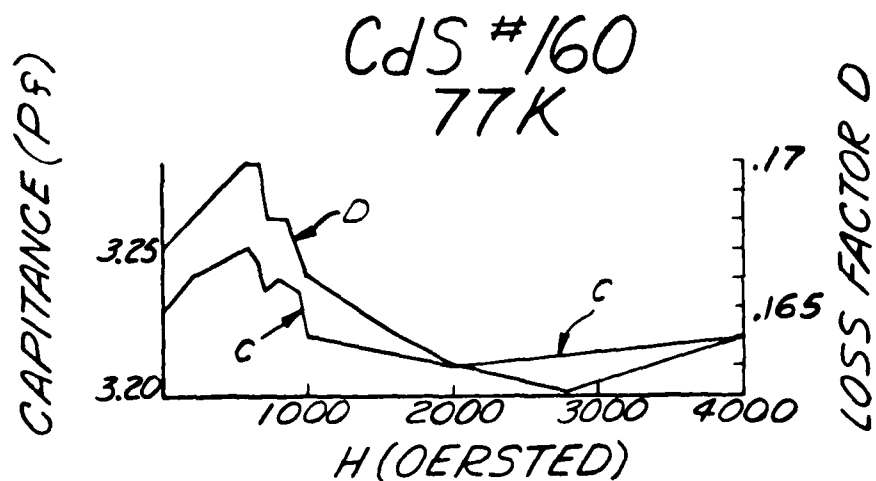

Dielectric response of pressure quenched CdS as a function of applied magnetic field.

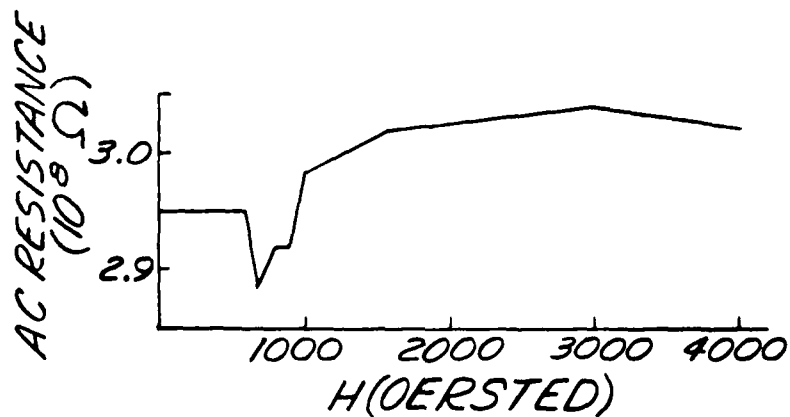

ac Resistance of pressure quenched CdS as a function of applied magnetic field.

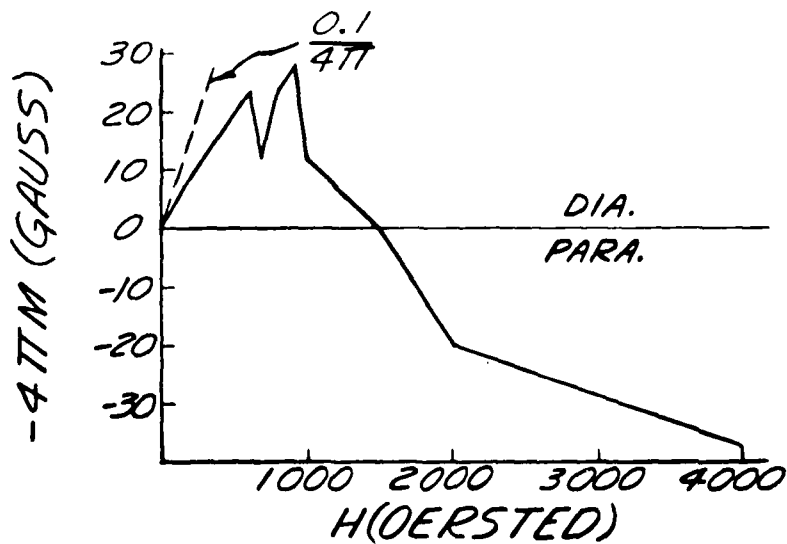

Magnetic moment of pressure quenched CdS as a function of applied magnetic field.

FIGURE 1

loss show a sharper drop which is almost complete at 1000 Oe. Above 1.5 kOe the specimen is in the positive magnetic state³ in which the capacitance and loss show only a smooth behavior with no sign of phase transitions.

Diamagnetism and dc Conductivity as a Function of H

A pressure quenched CdS specimen was cooled to 77 K and the magnetization and dc conductivity measured. The results are shown in Figure 2.


As the magnetic field is increased beyond 100 Oe, the dc conductivity decreases as the diamagnetism drops and flux enters the sample. (This specimen, showing constant diamagnetism up to 60 Oe, had been previously subjected to several exposures of fields of the order of 10 kOe while ac measurements were being made.) The ac results for the earlier runs for the sample were essentially the same as shown in Figure 1.

DISCUSSION


The observed relation between the magnetic behavior and the electrical transport behavior of these specimens is in general agreement with that expected of an inhomogeneous material containing superconducting regions below some percolation limit. The fact that a resistance increase is observed on an already large resistance implies that the normal state is highly resistive rather than metallic of low resistance. This is consistent with the observed decrease in the capacitance with the disappearance of the diamagnetism.

³C. G. Homan, D. P. Kendall, and R. K. MacCrone, Solid State Comm. 32, 521 (1979).

CdS #162
77 K

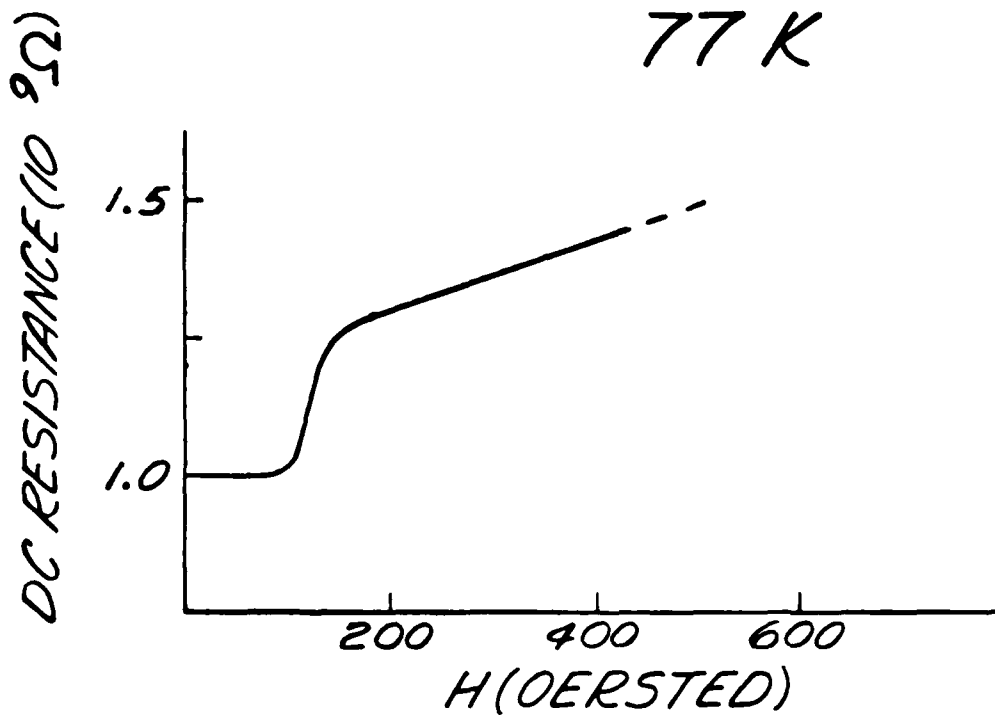

dc Resistance observed during the magnetic moment.

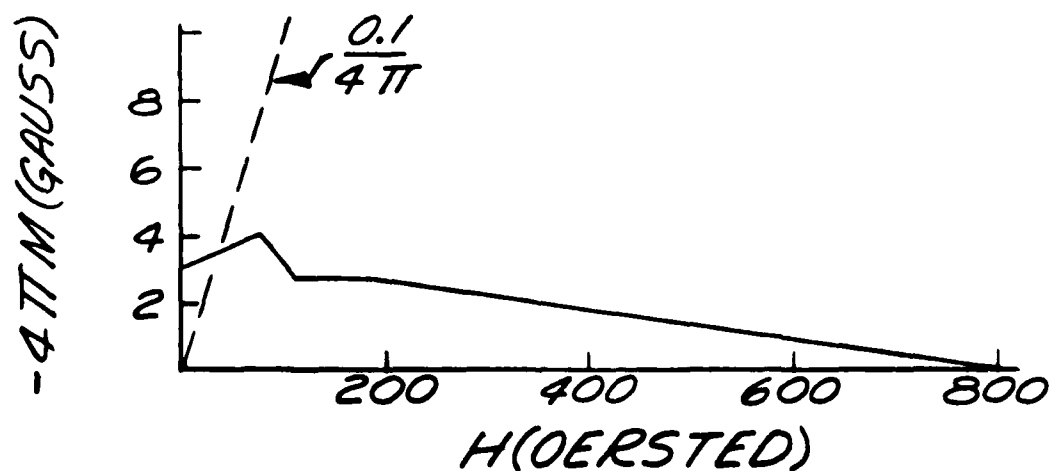

Magnetic moment of pressure quenched CdS as a function of applied magnetic field.

FIGURE 2

Rigorous analysis of the behavior expected of inhomogeneous material containing superconducting elements which become normal confirms the intuitive expectations. Computer calculations of general random resistive networks always show a drop in conductivity as the value of a resistive element is increased, corresponding to a superconducting region becoming normal.⁷ As pointed out by Landauer, the correspondence of J and E to D implies a corresponding decrease in capacitance as a capacitance element is added (again corresponding to a region becoming normal).

Thus the electrical behavior observed at the collapse of the diamagnetism in Figures 1 and 2 is fully consistent with the electrical behavior expected of an inhomogeneous semiconductor containing superconducting inclusions. This conclusion is very general and is not dependent on ad hoc assumptions or specific morphology.

However, some simple analysis is of interest. Consider, as a very crude model of the system, that the superconducting regions consist of thin sheets lying parallel to the plane of the disk. Then if d_s is the total thickness of superconductor, d the total thickness of specimen, we find:

$$\frac{\Delta\sigma}{\sigma} = \frac{\Delta c}{c} = \frac{d_s}{d}$$

⁷R. Landauer, "Electrical Conductivity in Inhomogeneous Media," in A.I.P. Conference Proceedings, No. 4, Eds. J. C. Garland and D. B. Tanner, 1978, "Electrical Transport and Optical Properties of Inhomogeneous Media," Ohio State University, 1977, p. 2.

The electrical results of Figure 1 imply, for these ac measurements, that

$$\frac{d_s}{d} \approx 0.02$$

with values ranging up to 0.09 in other specimens. The data of Figure 2 imply a ratio of

$$\frac{d_s}{d} \sim 0.16 \quad .$$

These differences are within the uncertainties of this crude model, particularly as far as the ac response is concerned which does not address the frequency dependence. The order of magnitude agreement we consider satisfactory. Furthermore, the correlation between the estimate of this volume fraction of superconductor based on electrical behavior above and the volume fraction of platelets based on direct metallographic observation, $\sim 15\%^2$ typical of this material, is remarkable. Occurrence of superconductivity in the platelets produces a natural explanation for both the less than Meissner flux exclusion and the lack of zero resistance in these specimens. We note that the magnetic flux exclusion decays as the electrical conductivity.

CONCLUSIONS

The disappearance of large diamagnetism with a simultaneous decrease in both ac and dc conductivity has been shown to occur in pressure quenched CdS at 77 K. Usually such measurements would be taken as evidence for the

²C. G. Homan and D. P. Kendall, Bull. Am. Phys. Soc. 24, 316 (1979). Details are presented in ARRADCOM Technical Report No. ARLCB-TR-79004, available from NTIS, Springfield, VA, AD No. A069-609.

presence of superconductivity. Our data is striking because of the relatively high temperature involved. We have not observed lossless electrical transport in our samples, which can be qualitatively understood by the unusual morphology of the pressurized samples. Several additional tests of superconductivity are presently being investigated. However, a possibility still exists that some new high temperature collective quantum state might be involved, as pointed out in our earlier work, and a re-interpretation of the data may eventually take place.

We are forced to conclude at this time that the conductivity and diamagnetic behavior of our pressure quenched CdS materials must be attributed to superconductivity at 77 K.

REFERENCES

1. E. Brown, C. G. Homan, and R. K. MacCrone, Phys. Rev. Lett. 45, 478 (1980).
2. C. G. Homan and D. P. Kendall, Bull. Am. Phys. Soc. 24, 316 (1979).
Details are presented in ARRADCOM Technical Report No. ARLCB-TR-79004, available from NTIS, Springfield, VA, AD No. A069-609.
3. C. G. Homan, D. P. Kendall, and R. K. MacCrone, Solid State Comm. 32, 521 (1979).
4. J. C. Phillips, Phys. Rev. Lett. 20, 550 (1968).
5. P. J. Cote, G. P. Capsimalis, and C. G. Homan, Private Communication, to be published in Applied Physics Letters, May 1981.
6. Private Communication - U.S. National Bureau of Standards, Report No. 553-33-Y-81, 1980 (unpublished).
7. R. Landauer, "Electrical Conductivity in Inhomogeneous Media," in A.I.P. Conference Proceedings, No. 40, Eds. J. C. Garland and D. B. Tanner, 1978, "Electrical Transport and Optical Properties of Inhomogeneous Media," Ohio State University, 1977, p. 2.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
COMMANDER	1
CHIEF, DEVELOPMENT ENGINEERING BRANCH	1
ATTN: DRDAR-LCB-DA	1
-DM	1
-DP	1
-DR	1
-DS	1
-DC	1
CHIEF, ENGINEERING SUPPORT BRANCH	1
ATTN: DRDAR-LCB-SE	1
-SA	1
CHIEF, RESEARCH BRANCH	2
ATTN: DRDAR-LCB-RA	1
-RC	1
-RM	1
-RP	1
CHIEF, LWC MORTAR SYS. OFC.	1
ATTN: DRDAR-LCB-M	
CHIEF, IMP. 81MM MORTAR OFC.	1
ATTN: DRDAR-LCB-I	
TECHNICAL LIBRARY	5
ATTN: DRDAR-LCB-TL	
TECHNICAL PUBLICATIONS & EDITING UNIT	2
ATTN: DRDAR-LCB-TL	
DIRECTOR, OPERATIONS DIRECTORATE	1
DIRECTOR, PROCUREMENT DIRECTORATE	1
DIRECTOR, PRODUCT ASSURANCE DIRECTORATE	1

NOTE: PLEASE NOTIFY ASSOC. DIRECTOR, BENET WEAPONS LABORATORY, ATTN:
DRDAR-LCB-TL, OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT.)

	NO. OF COPIES		NO. OF COPIES
COMMANDER DEFENSE RESEARCH OFFICE ATTN: DTIA-TCA CAMP BELL, TRIANGLE PARK, NC 27709	1	COMMANDER DEFENSE TECHNICAL INFO CENTER ATTN: DTIA-TCA CAMERON STATION ALEXANDRIA, VA 22314	12
COMMANDER ARMY HARRY DIAMOND LAB ATTN: TECH LIB PO BOX 1000, POWDER MILL ROAD FARMINGDALE, NC 20783	1	METALS & CERAMICS INFO CEN BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
DR. J. R. DOR ARMY INDUSTRIAL BASE ENG ACT ATTN: DRXPE-MT MARIETTA, IL 61201	1	MECHANICAL PROPERTIES DATA CTR BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
CHIEF, MATERIALS BRANCH ARMY RAS GROUP, EUR ATTN: DRXSY-MP FPO N.Y. 09510	1	MATERIEL SYSTEMS ANALYSIS ACTV ATTN: DRXSY-MP ABERDEEN PROVING GROUND MARYLAND 21005	1
COMMANDER NAVAL SURFACE WEAPONS CEN ATTN: CHIEF, MAT SCIENCE DIV FALLS CHURCH, VA 22448	1		
DIRECTOR US NAVAL RESEARCH LAB ATTN: DIR, MECH DIV CODE 26-27 (DOC LIB) WASHINGTON, D. C. 20375	1		
NASA SCIENTIFIC & TECH INFO FAC. P. O. BOX 3757, ATTN: ACQ BR BALTIMORE/WASHINGTON INTL AIRPORT BALTIMORE, MD 21240	1		

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY,
DRDAF-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY
REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
ASST SEC OF THE ARMY		COMMANDER	
RESEARCH & DEVELOPMENT		US ARMY TANK-AUTMV R&D COMD	
ATTN: DEP FOR SCI & TECH	1	ATTN: TECH LIB - DRDTA-UL	1
THE PENTAGON		MAT LAB - DRDTA-RK	1
WASHINGTON, D.C. 20315		WARREN, MICHIGAN 48090	
COMMANDER		COMMANDER	
US ARMY MAT DEV & READ. COMD		US MILITARY ACADEMY	
ATTN: DRCDE	1	ATTN: CHMN, MECH ENGR DEPT	1
5001 EISENHOWER AVE		WEST POINT, NY 10996	
ALEXANDRIA, VA 22333			
COMMANDER		US ARMY MISSILE COMD	
US ARMY ARRADCOM		REDSTONE SCIENTIFIC INFO CEN	
ATTN: DRDAR-LC	1	ATTN: DOCUMENTS SECT, BLDG 4484	2
-LCA (PLASTICS TECH	1	REDSTONE ARSENAL, AL 35898	
EVAL CEN)		COMMANDER	
-LCE	1	REDSTONE ARSENAL	
-LCM	1	ATTN: DRSMI-RRS	1
-LCS	1	-RSM	1
-LCW	1	ALABAMA 35809	
-TSS (STINFO)	2	COMMANDER	
DOVER, NJ 07801		ROCK ISLAND ARSENAL	
COMMANDER		ATTN: SARRI-ENM (MAT SCI DIV)	1
US ARMY ARRCOM		ROCK ISLAND, IL 61202	
ATTN: DRSAR-LEP-L	1	COMMANDER	
ROCK ISLAND ARSENAL		HQ, US ARMY AVN SCH	
ROCK ISLAND, IL 61299		ATTN: OFC OF THE LIBRARIAN	1
DIRECTOR		FT RUCKER, ALABAMA 36362	
US ARMY BALLISTIC RESEARCH LABORATORY		COMMANDER	
ATTN: DRDAR-TSB-S (STINFO)	1	US ARMY FGN SCIENCE & TECH CEN	
ABERDEEN PROVING GROUND, MD 21005		ATTN: DRXST-SD	1
COMMANDER		220 7TH STREET, N.E.	
US ARMY ELECTRONICS COMD		CHARLOTTESVILLE, VA 22901	
ATTN: TECH LIB	1	COMMANDER	
FT MONMOUTH, NJ 07703		US ARMY MATERIALS & MECHANICS	
COMMANDER		RESEARCH CENTER	
US ARMY MOBILITY EQUIP R&D COMD		ATTN: TECH LIB - DRXMR-PL	2
ATTN: TECH LIB	1	WATERTOWN, MASS 02172	
FT BELVOIR, VA 22060			

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.